

FIG. 1

FIG. 1

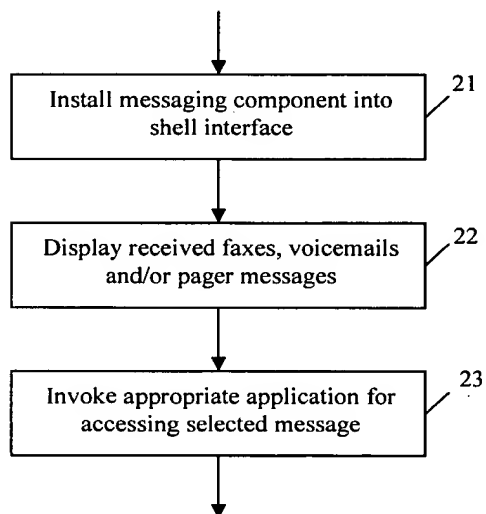
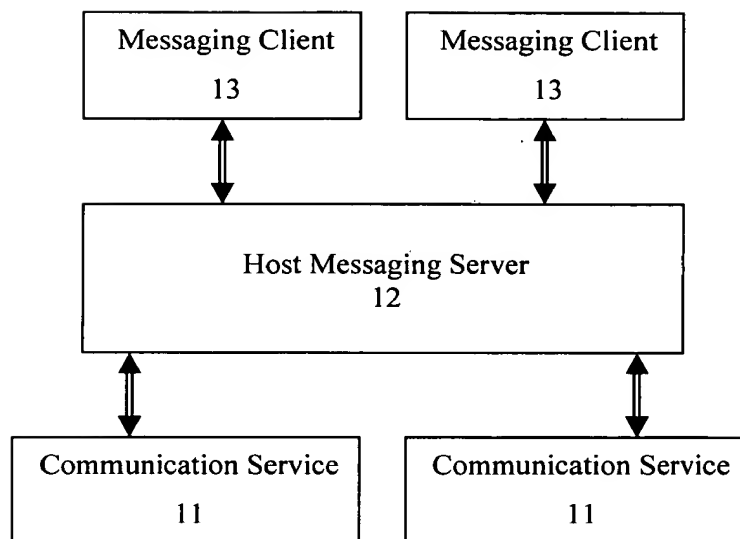


FIG. 2

09944699-083101

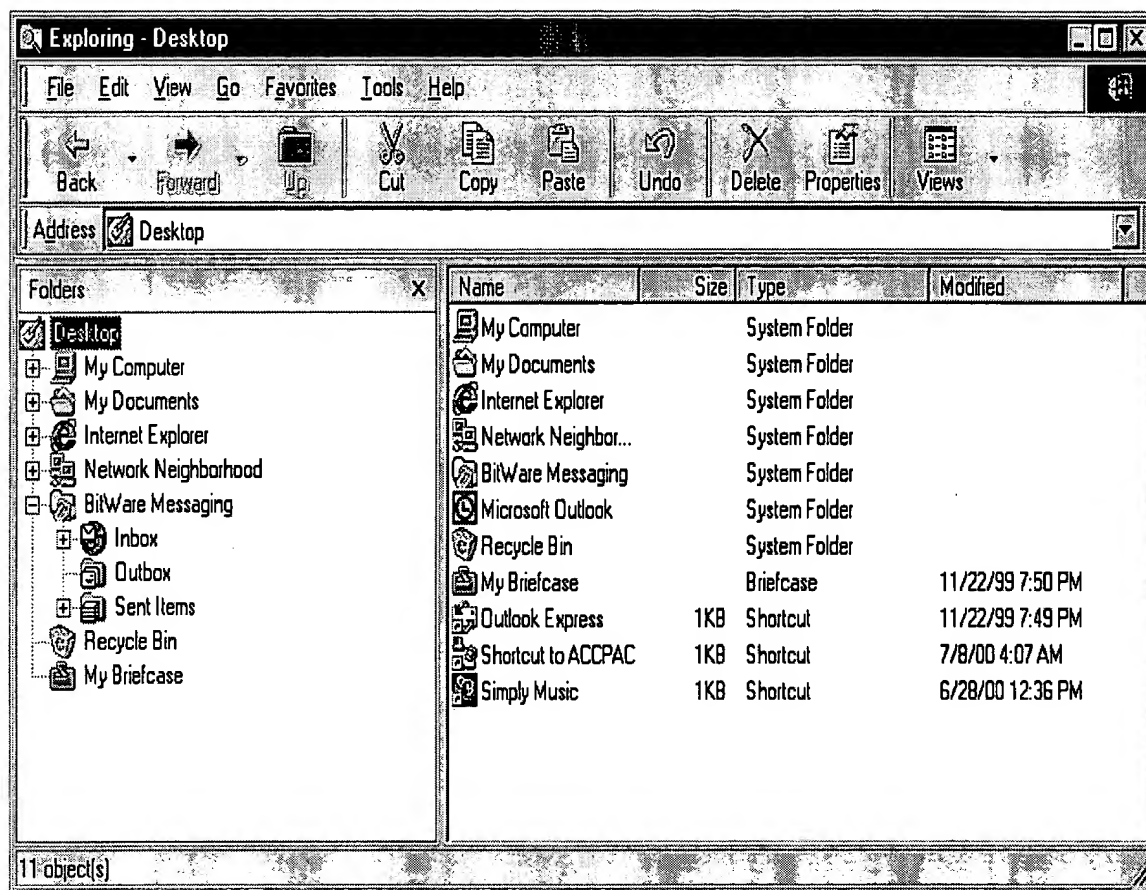


FIG. 3

0944599-003101

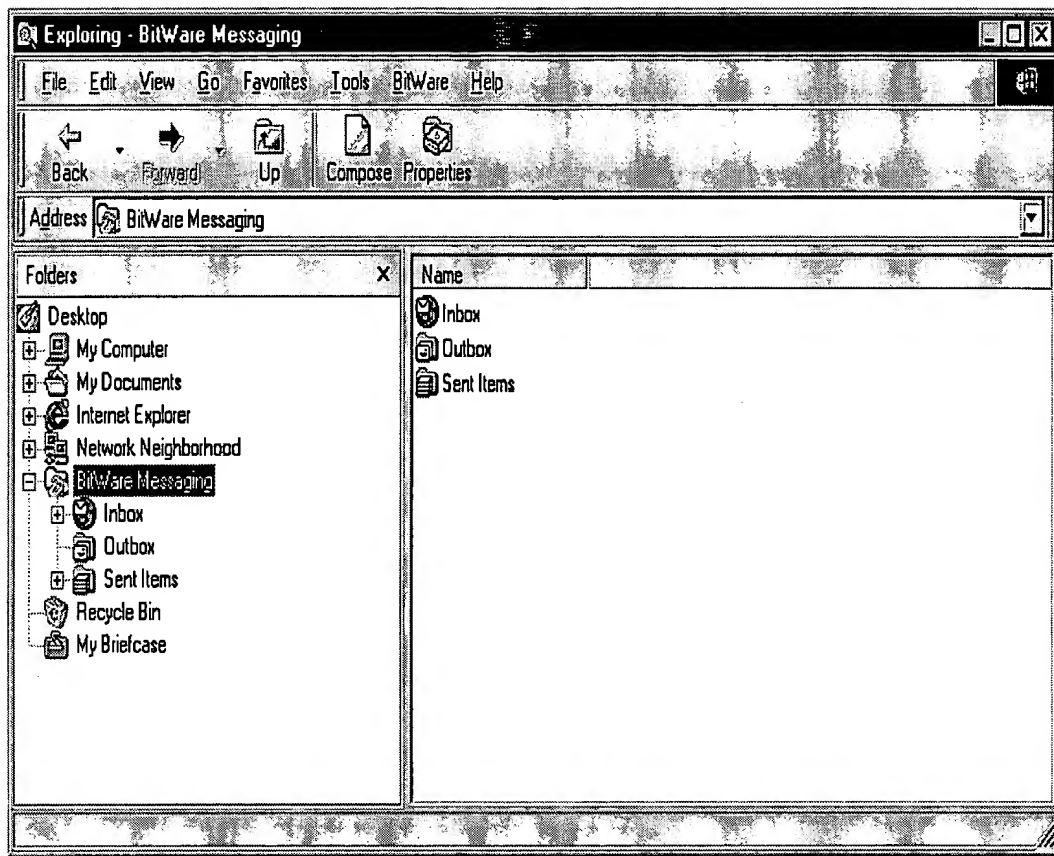


FIG. 4

00044609-083101

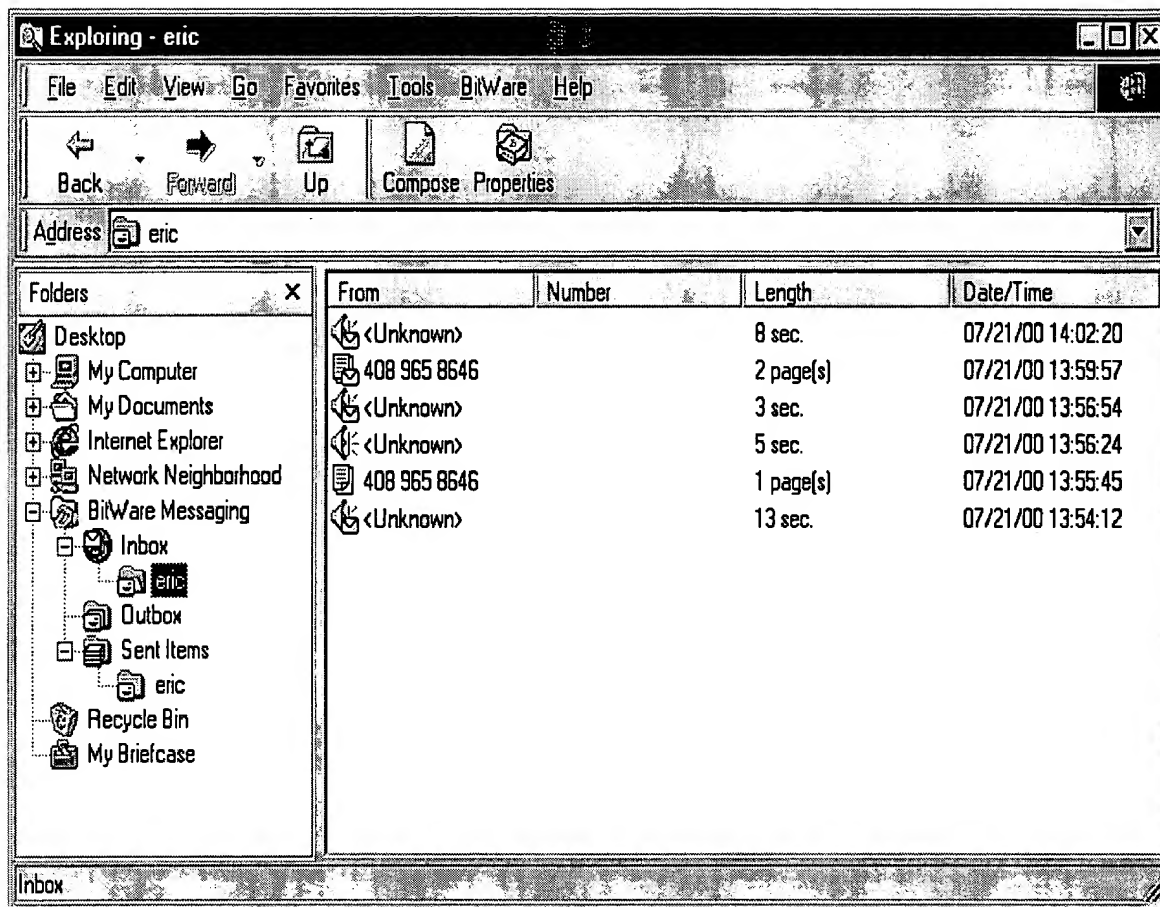


FIG. 5

0944599-083101

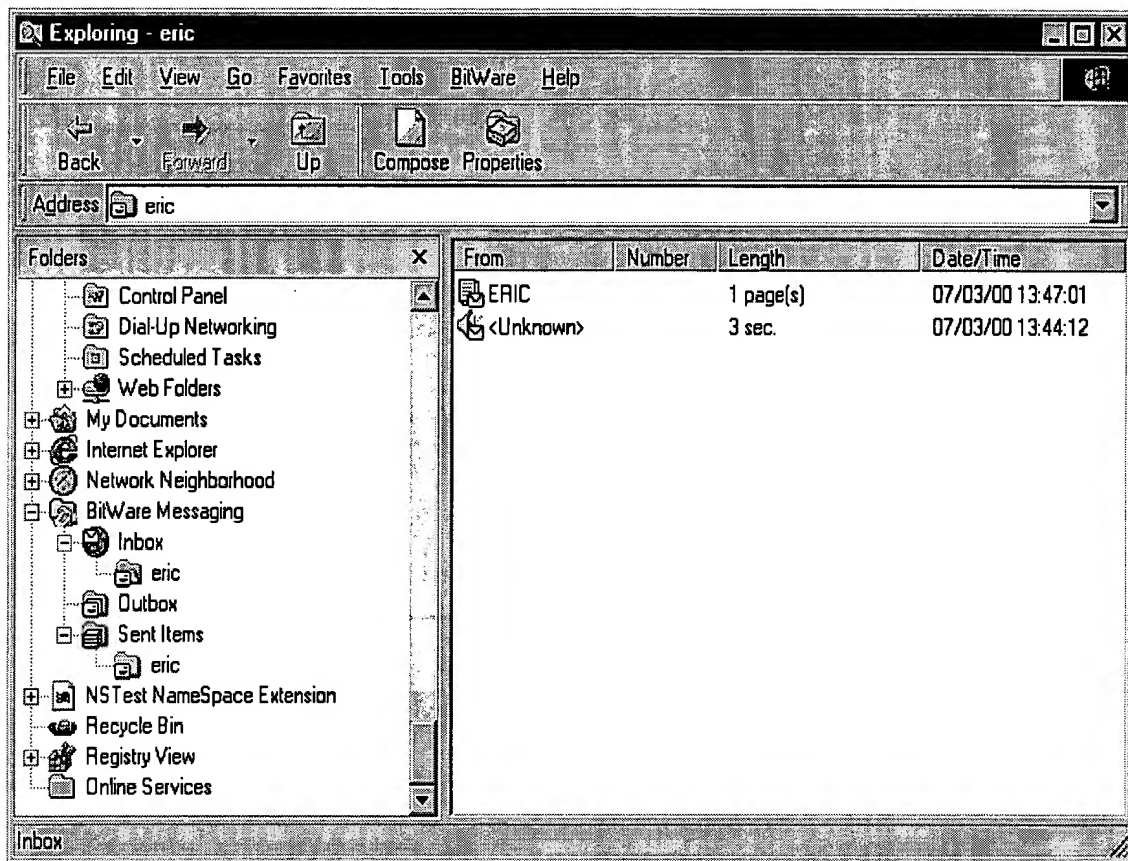


FIG. 6

Simply Compose [X]

From:

Recipient information

To: **Company:**


Fax: **United States of America (1)** **(408)**

Recipient list

Recipient name	Number	Company	<input type="button" value="Remove"/>

FIG. 7

FIG. 8

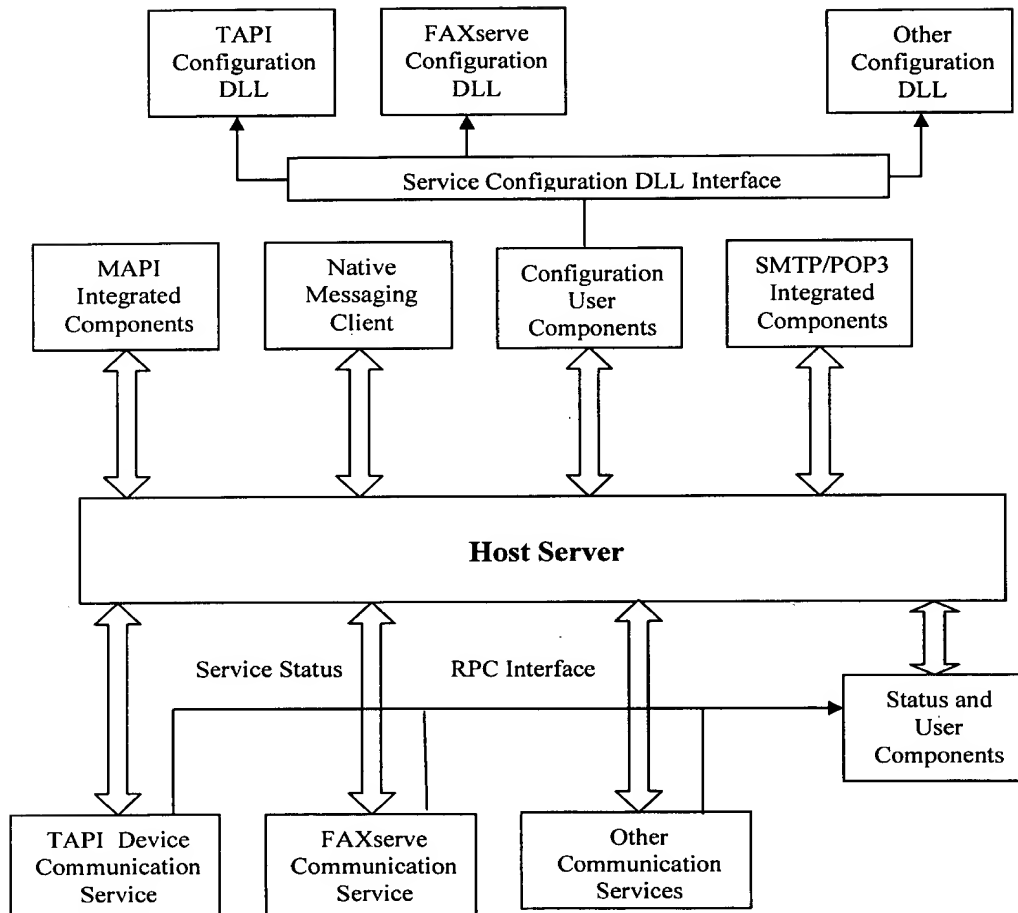

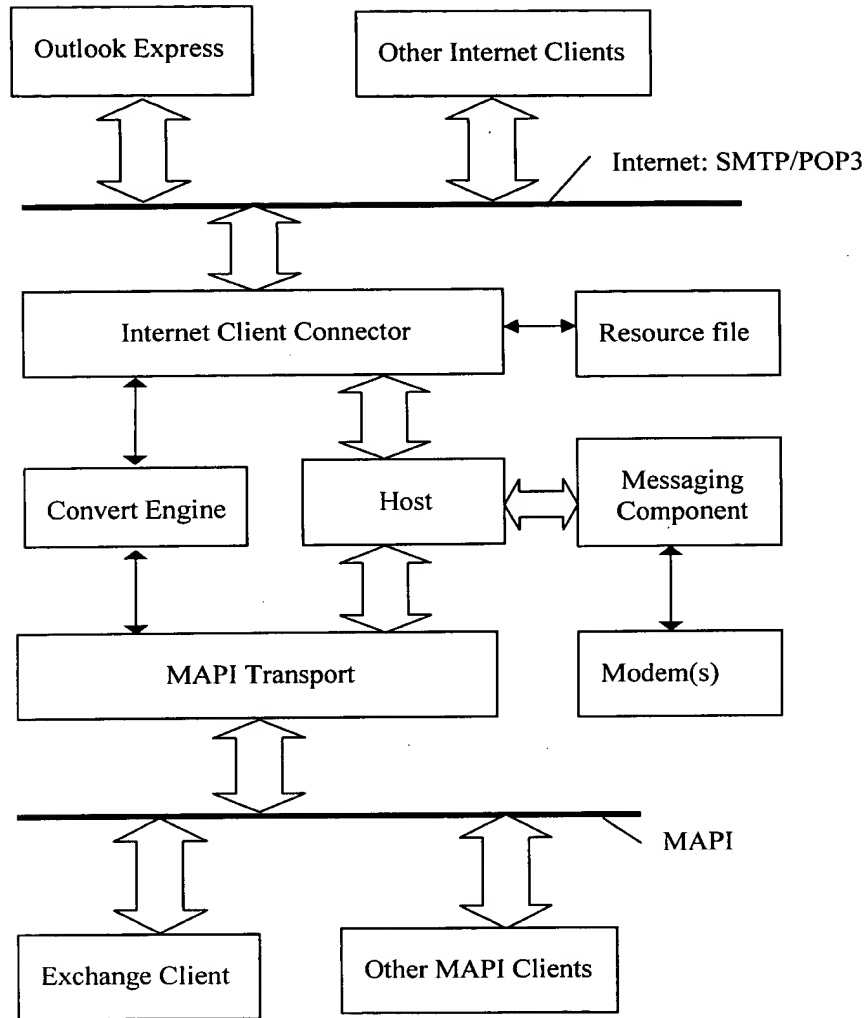


FIG. 9

094459 0310
T01E30" 65947650

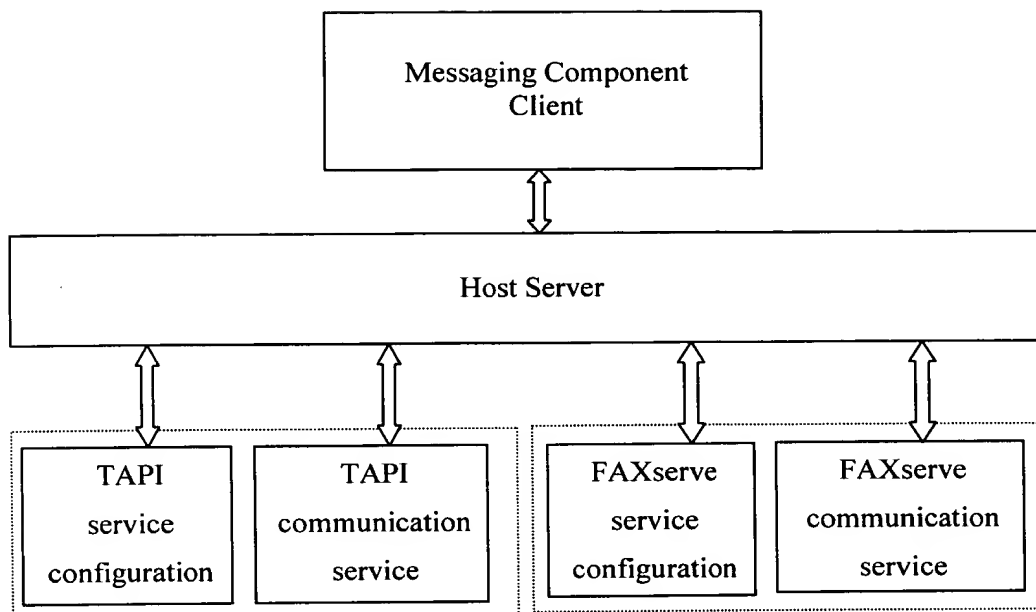


FIG. 10

09944699.083101

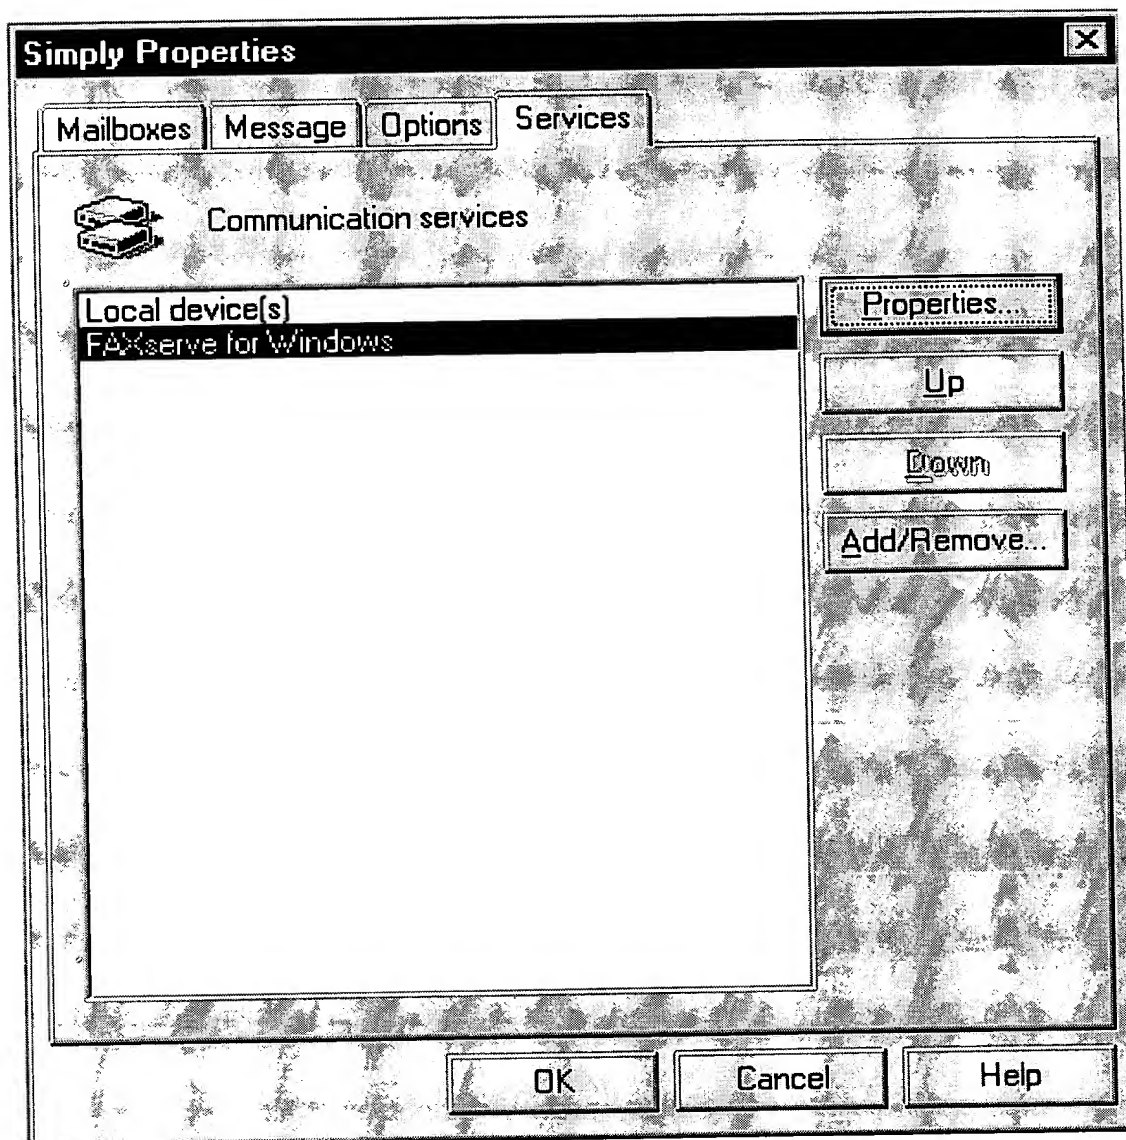


FIG. 11

10944699 003101

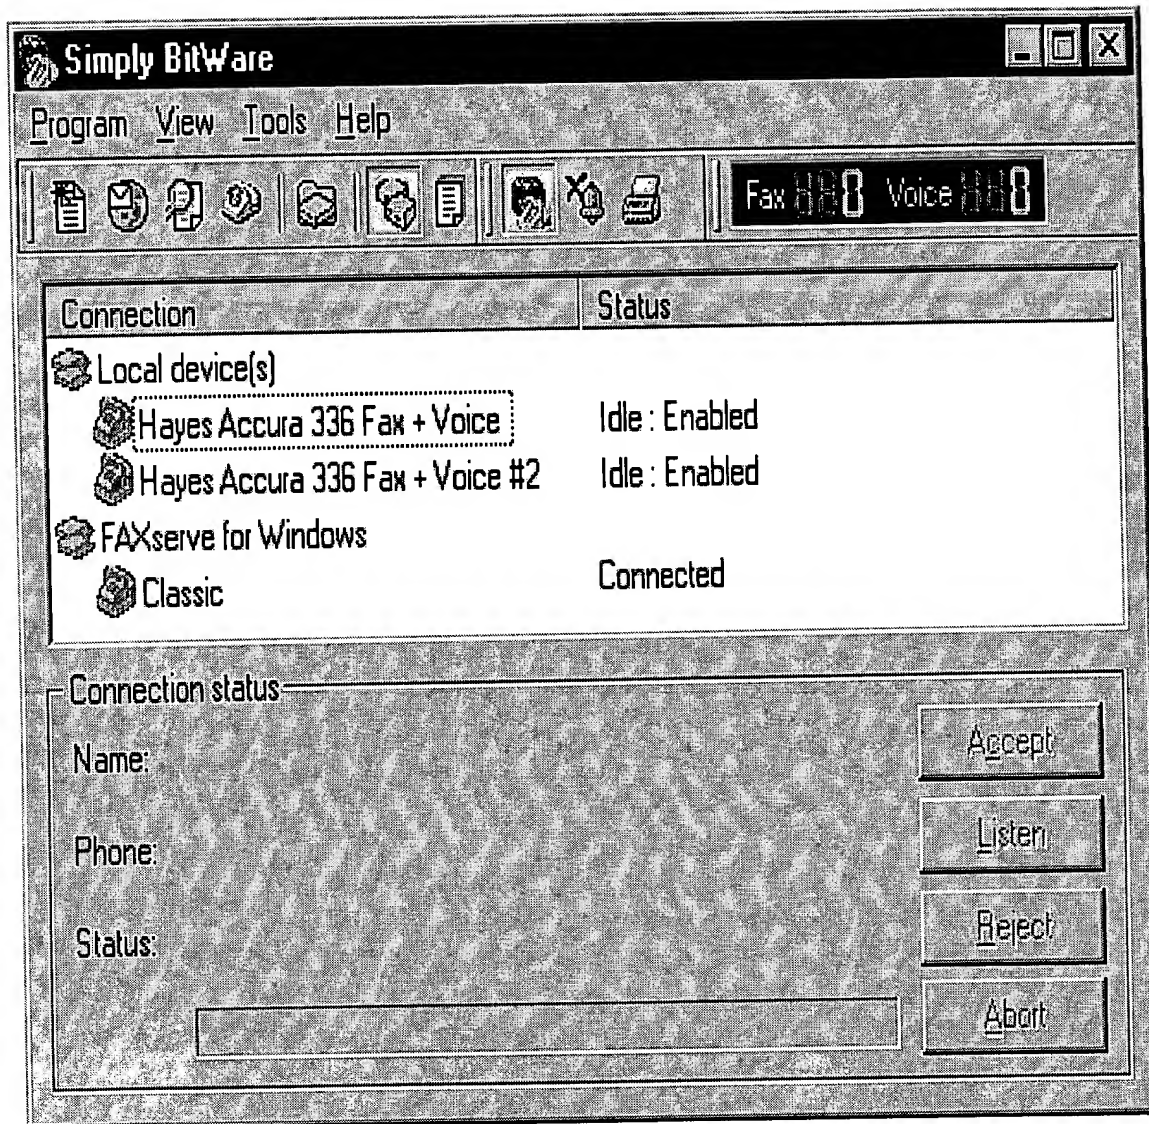


FIG. 12

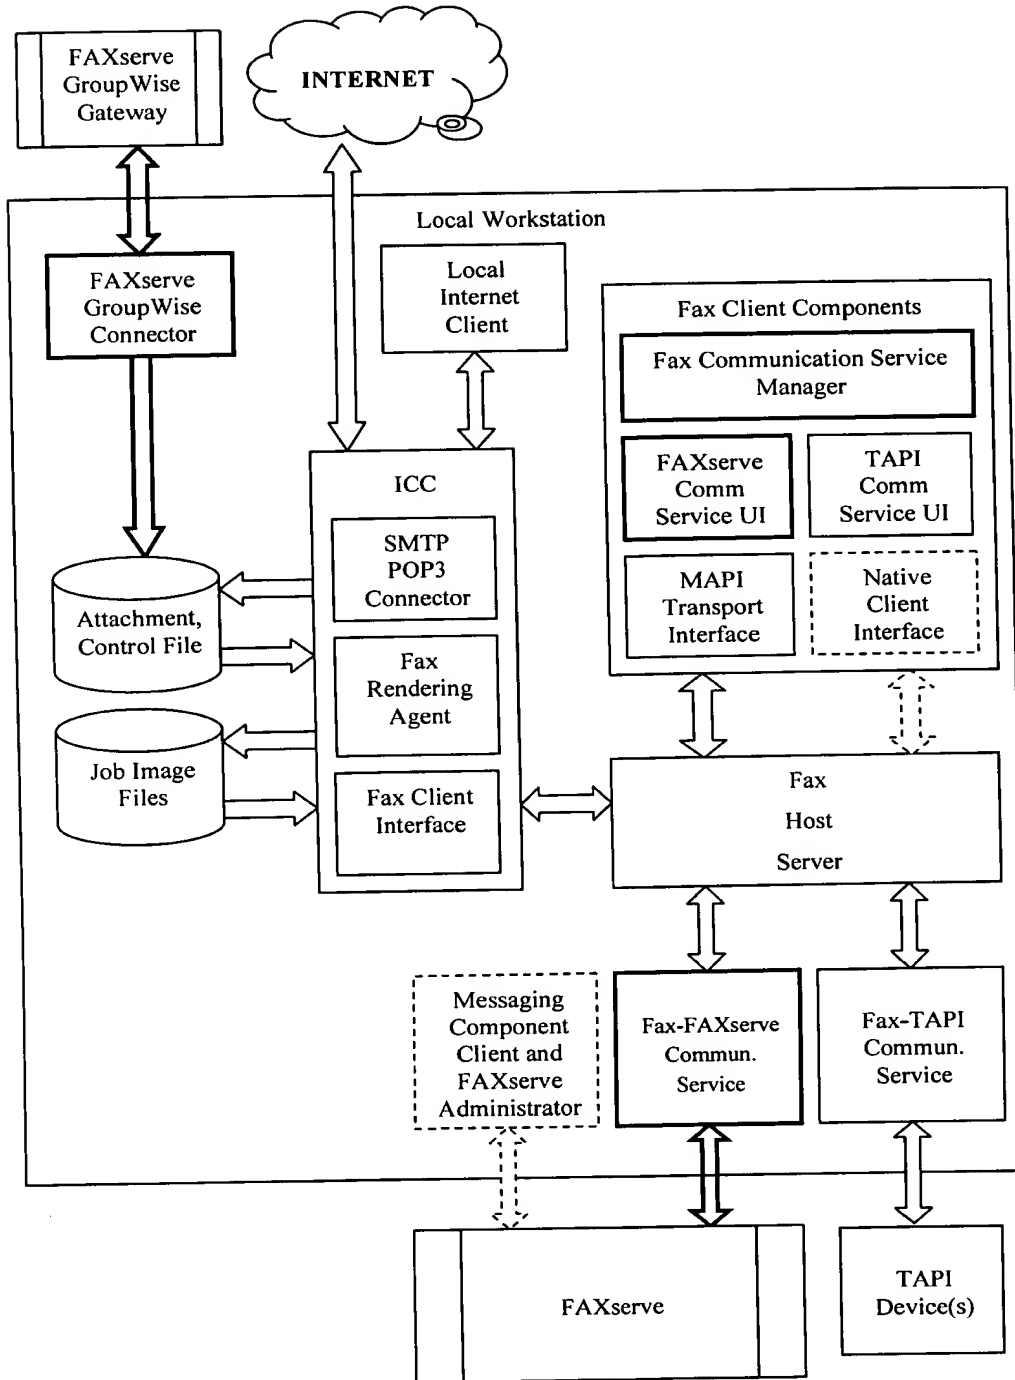


FIG. 13

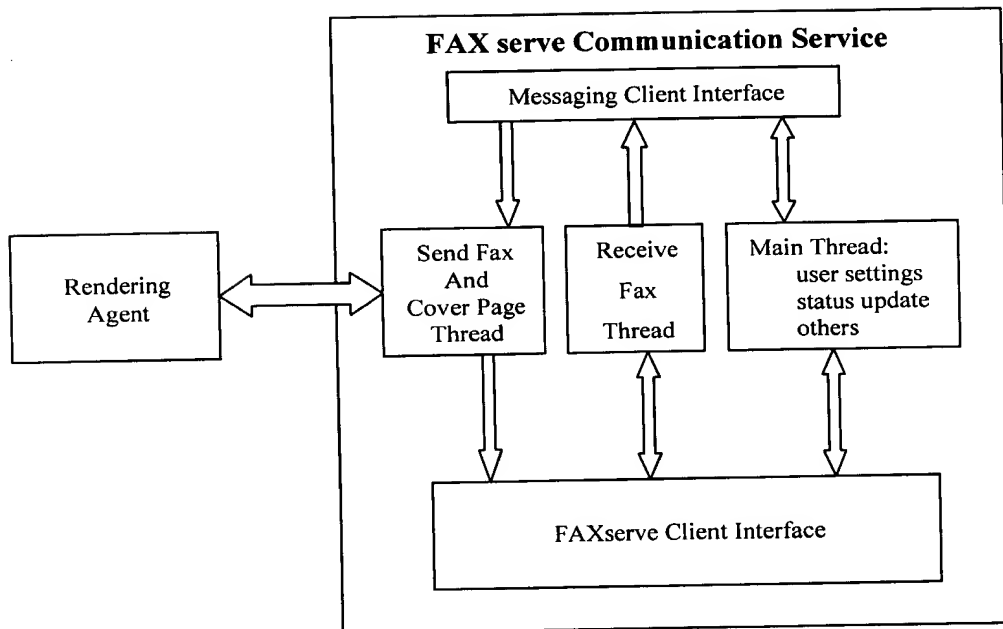


FIG. 14

0944599.083101
T07E80"66244660

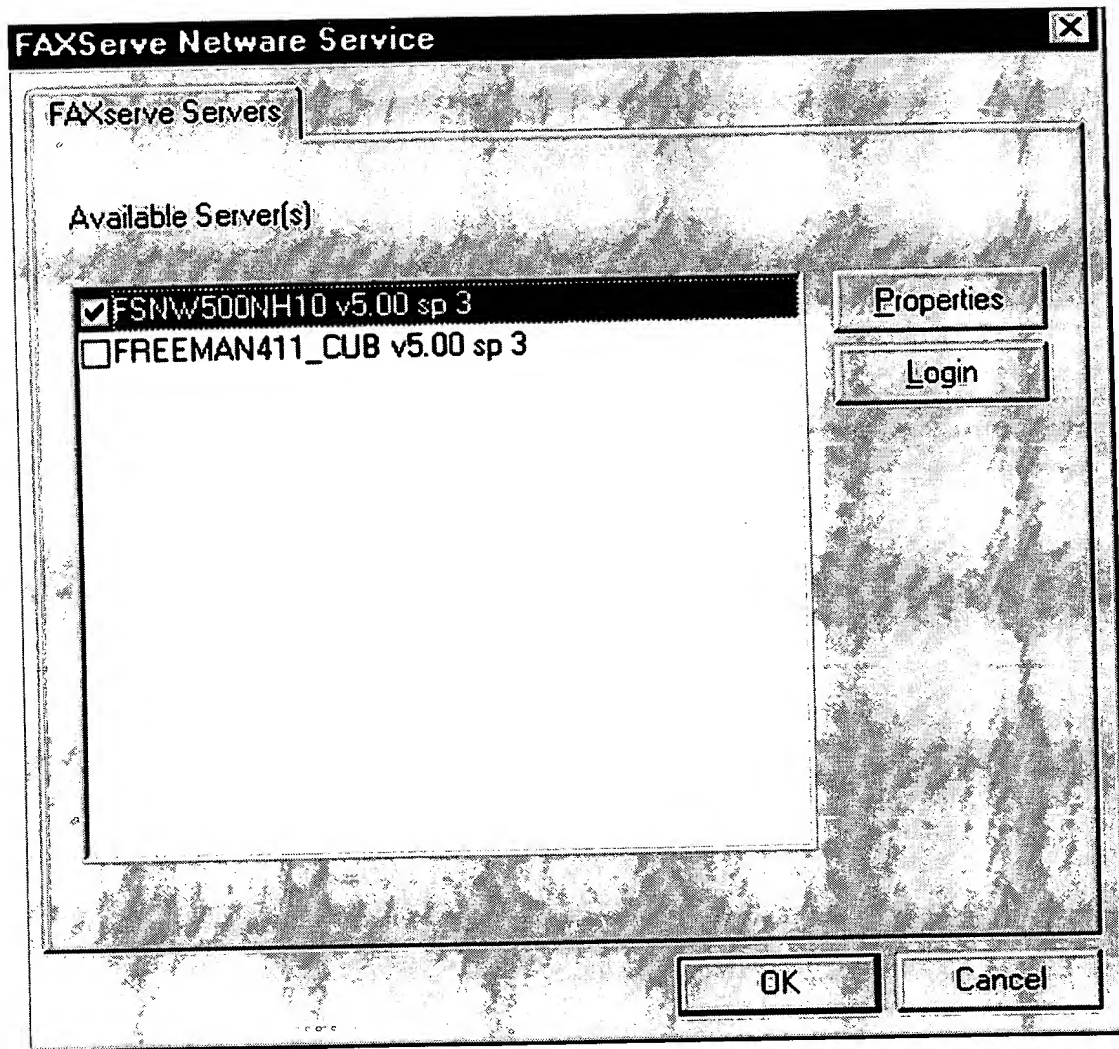


FIG. 15

0944699-023101
T07E20" 66 944650

FAXServe Netware Service [X]

General | GroupWise

Server: FSNW500NH10

User: ADMIN

☒ Enable Outbound Fax

☒ Enable Incoming Fax

Route to Client Mailbox:

sinping

OK Cancel

FIG. 16

FIG. 17

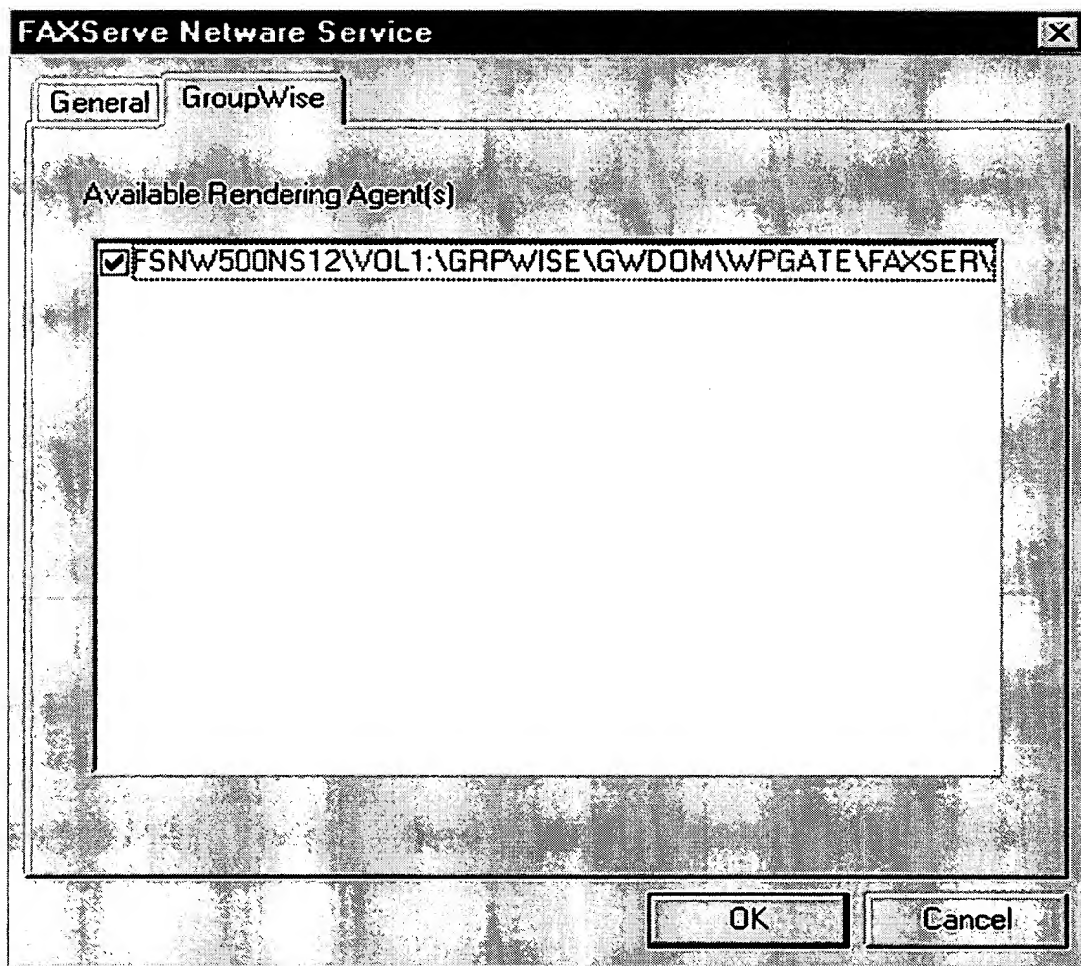


FIG. 17

0944699 083101
10:28:00 6694469

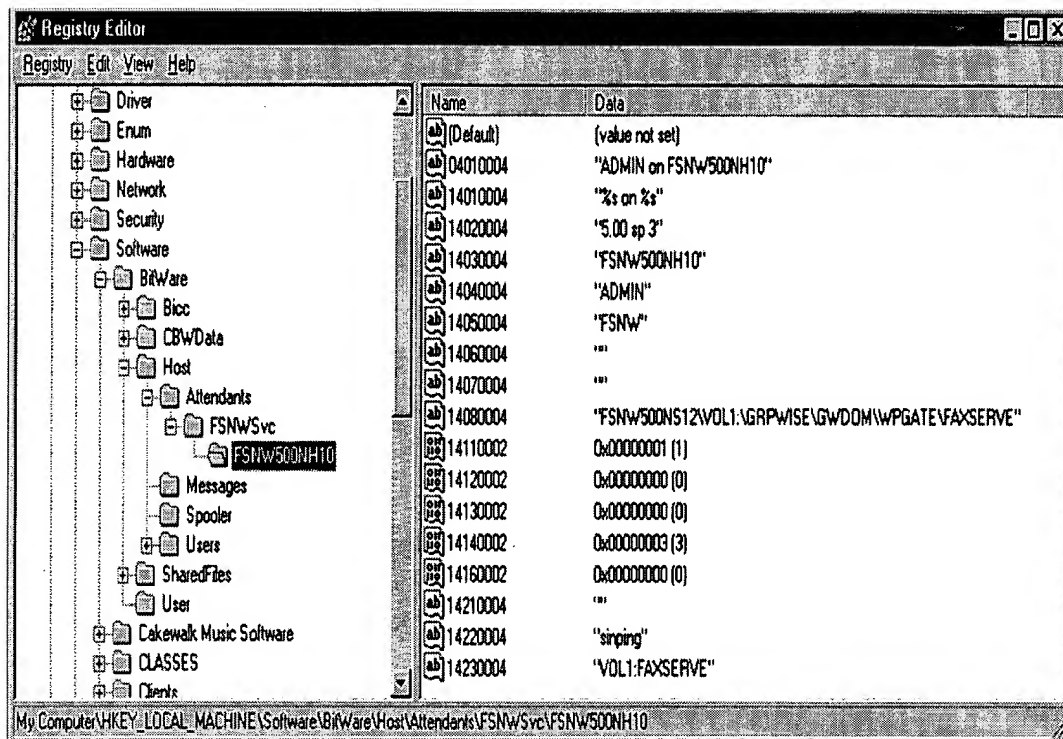


FIG. 18

0944699-003101

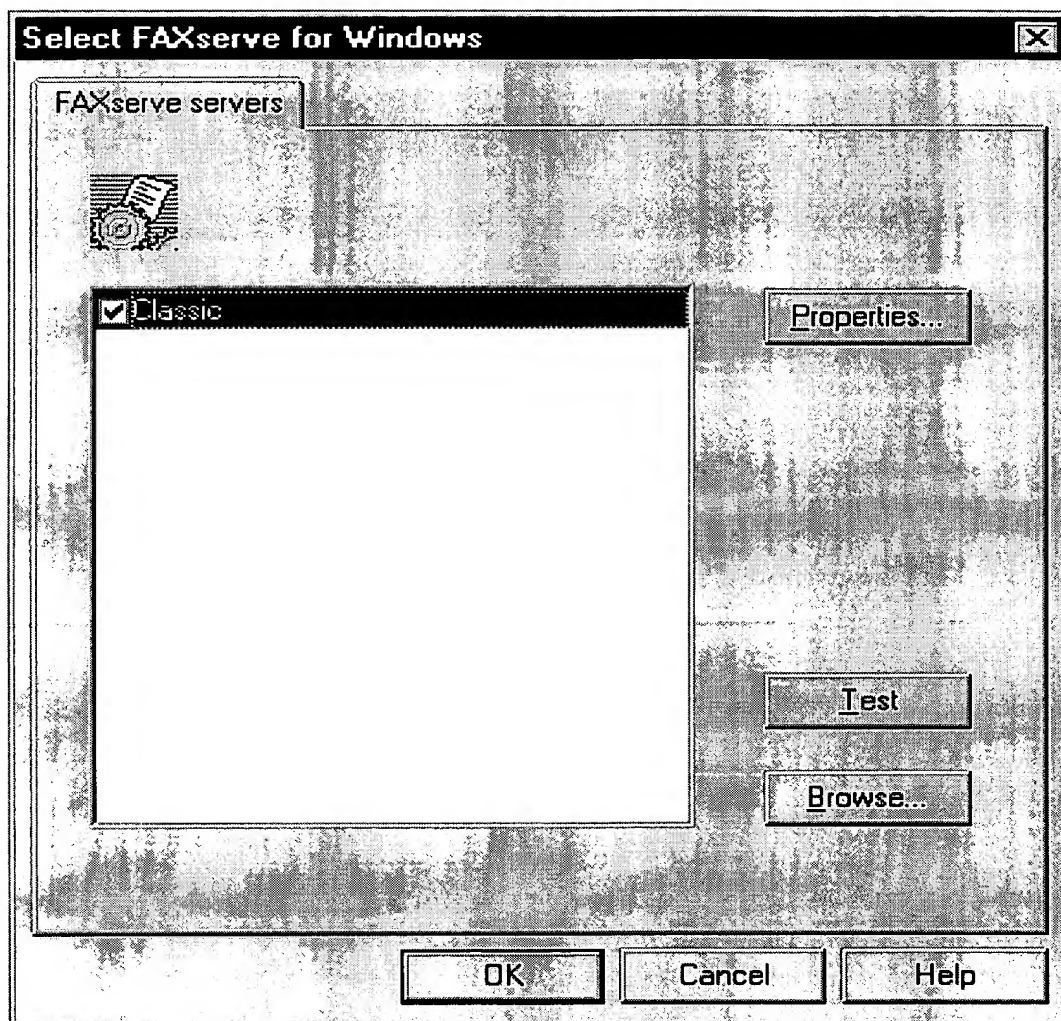


FIG. 19

0044699-003101
T07E00-66944600

The image shows a Windows-style dialog box titled "FAXserve for Windows Properties". It contains the following elements:


- Server Name:** A text box containing the word "Classic".
- Enable Outbound Faxes:** A checkbox that is checked.
- Enable Inbound Faxes:** A checkbox that is checked.
- Simply mailbox name:** A text box containing the name "eric", with a small dropdown arrow on the right side.
- Buttons:** "OK" and "Cancel" buttons at the bottom.

FIG. 20

09944699.083101

Simply Properties [X]

Device | **General** | Transmission | Greetings | Prompts

 General properties for this Simply Talk device

Device(s):

SupraSonic 336V+ Plug & Play

Inbound call

Answer mode: ☒ Voice ☒ Fax

Outbound call

Use this device to send: ☒ Voice ☒ Fax ☒ Pager

Fax settings

Modem class: []

OK Cancel

FIG. 21

10944699.083101
T07E80" 66944699

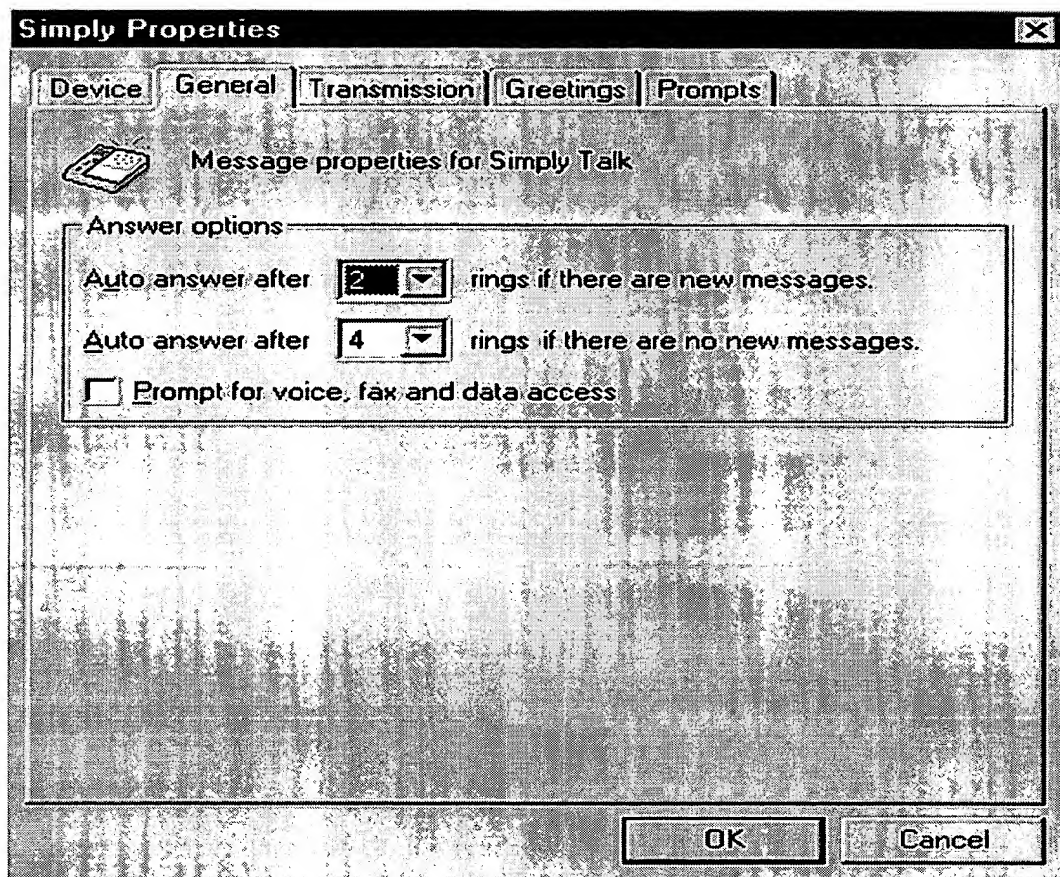



FIG. 22

Simply Properties.. [X]

Device | **General** | Transmission | Greetings | Prompts

 **Transmission options for Simply Talk**

Retry options

Retry time(s) after first transmission

Delay minute(s) before starting next

Outbound voice options

Play greeting secs after connection and
☒ repeat greeting until message plays.

Play message secs after connection.

☐ Automatically print transmitted faxes

Printer:

FIG. 23

Simply Properties

Device | General | Transmission | **Greetings** | Prompts

Message greetings

Default greeting

Add
Delete
Set default

Selected greeting

Position: 0.0 sec. Length: 2.5 sec.

☒ **Announce List of Mailboxes**

☒ Announce all mailbox names and numbers.

☐ Select mailbox to announce by last name.

☒ Sort announcement list by mailbox number.

☐ Sort announcement list by mailbox user's last name.

OK Cancel

FIG. 24

FIG. 25

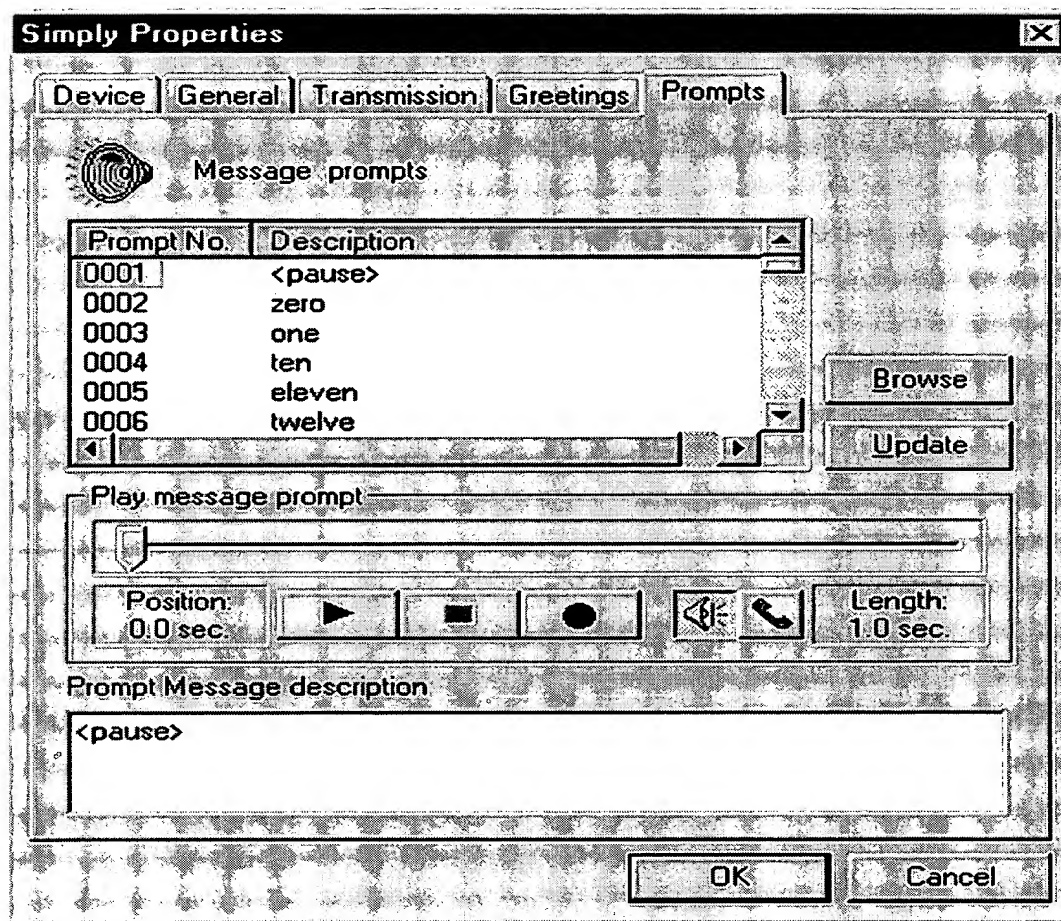


FIG. 25